
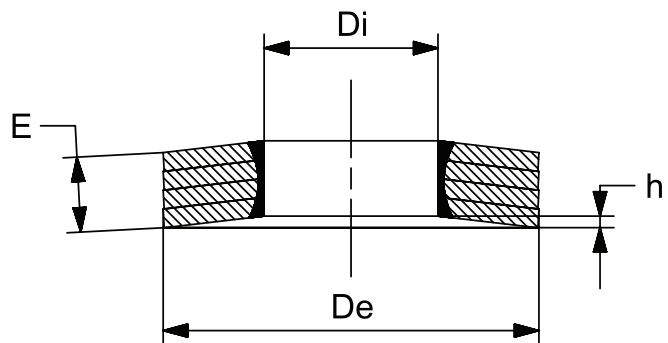


tiefastener[®]

USE THE BEST

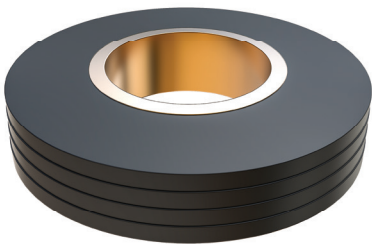

Technical Specifications

| | | |
|--------------|-------------------------|-------------------|
| Product Code | Item Number | 502103 |
| VPE | Per 1000 pcs. in kg | 5.20 |
| | Materials | Carbon Steel C60S |
| De | Outer Diameter (mm) | 18,00 |
| Di | Inner Diameter (mm) | 8,50 |
| E | Material Thickness (mm) | 3,60 |
| h | Stroke (mm) | 0,56 |
| | Test Load (DaN) | 1200 |
| | h After test | 0,34 |
| | Screw Size | M8 |

Description
TIESPRING 4L

Alternative Materials

*Carbon Steel C60S DIN EN 10132, hardness 420-510 Hv 10 after heat-treatment for hardening and tempering

*Stainless Steel AISI 304 (InoxA2) EN 10088, No1.4301 cold rolled at high resistance.

*Stainless Steel AISI 316 (InoxA4) EN 10088, No1.4401 cold rolled at high resistance.